


## ADAPTOR 1/2 TO 3/4 Réf.: 9292340081

### Caracteristics

**USE:** Our range of non-sparking tools guarantees safety in a high explosive atmosphere (ATEX). In addition to its explosion-proof properties, the Cu-Be alloy is also anti-magnetic and highly corrosion resistant. **QUALITY:** The grade of the alloy is Cu-Be 25, whose resistance properties are greater than other grades of Cu-Be Alloy. The products' quality is thoroughly inspected to insure the non-sparking properties and a high corrosion resistance. Cu-Be Alloy is made by casting. Most of our tools are forged to increase the density of the alloy by 30%. That places the quality of our range among the best on the market. **Technical information – Materials :** CU – copper: 97.5%. Ni+co: 0.2% - 1.2% **Hardness:** 280-365 Brinell Be- Beryllium: 1.9% +/- 0.1% - Others: contains less than 0.5% of other materials. **Tensile strength:** 1250 N/mm2. The products have anti explosion features in explosive atmosphere (ATEX) of any risk level (permanent, frequent or occasional use), to gas (ATEX Zone 0 to 2, Category 1 to 3) or/and to dust (ATEX TYPE from 20 to 22). **Standards :** EN 1127-1 5 (2008), EN 13463-1 (2007) and EN 13463-5 standards.

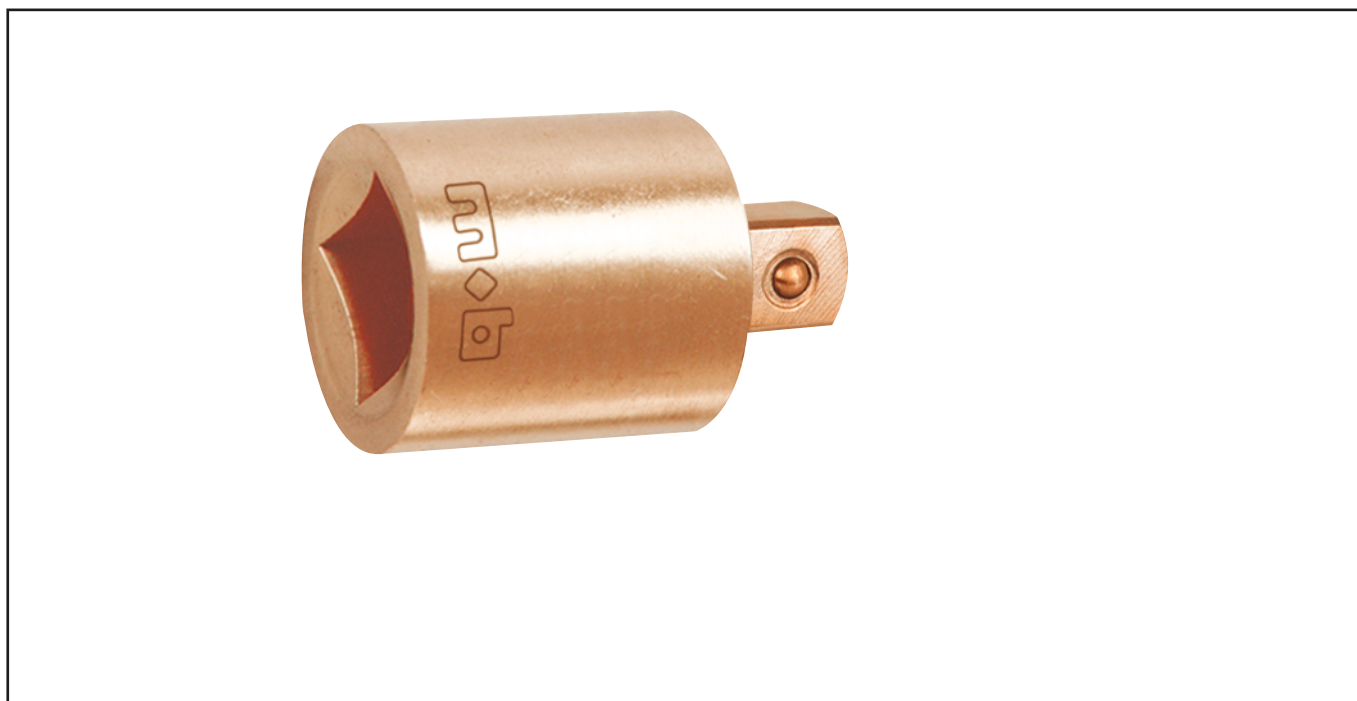

### Product data

Dim mm	G	Artikelnr.		EAN Code
1/2**3/4"		9292340081	1	3303801808262



**NOVALIA SAS** 2 rue de Bergognon 42500 LE CHAMBON F.  
FRANCE - [www.novalia.pro](http://www.novalia.pro)  
**PEDDINGHAUS** Handwerkzeuge In der Graslake 35  
58332 Schwelm DEUTSCHLAND - [www.peddinghaus.de](http://www.peddinghaus.de)  
**NOVALIA SA** Str. Narciselor nr.50 500251 - Braşov ROMÂNIA  
[www.mob-ius.ro](http://www.mob-ius.ro)  
**NOVALIA ESPAÑA** Portuetxe 51, of.204 20018 San Sebastián